




SEM/FIB Solenoid Coating Photos

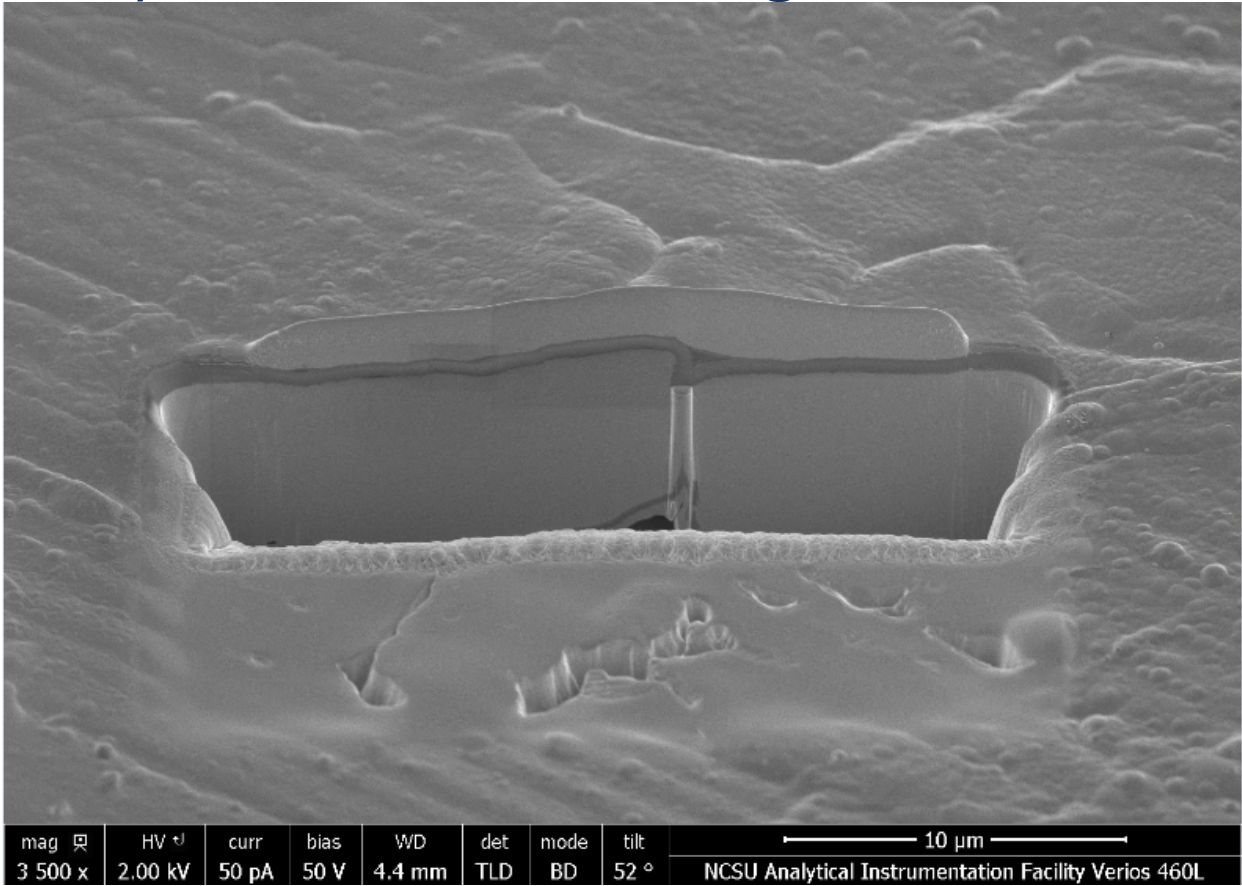


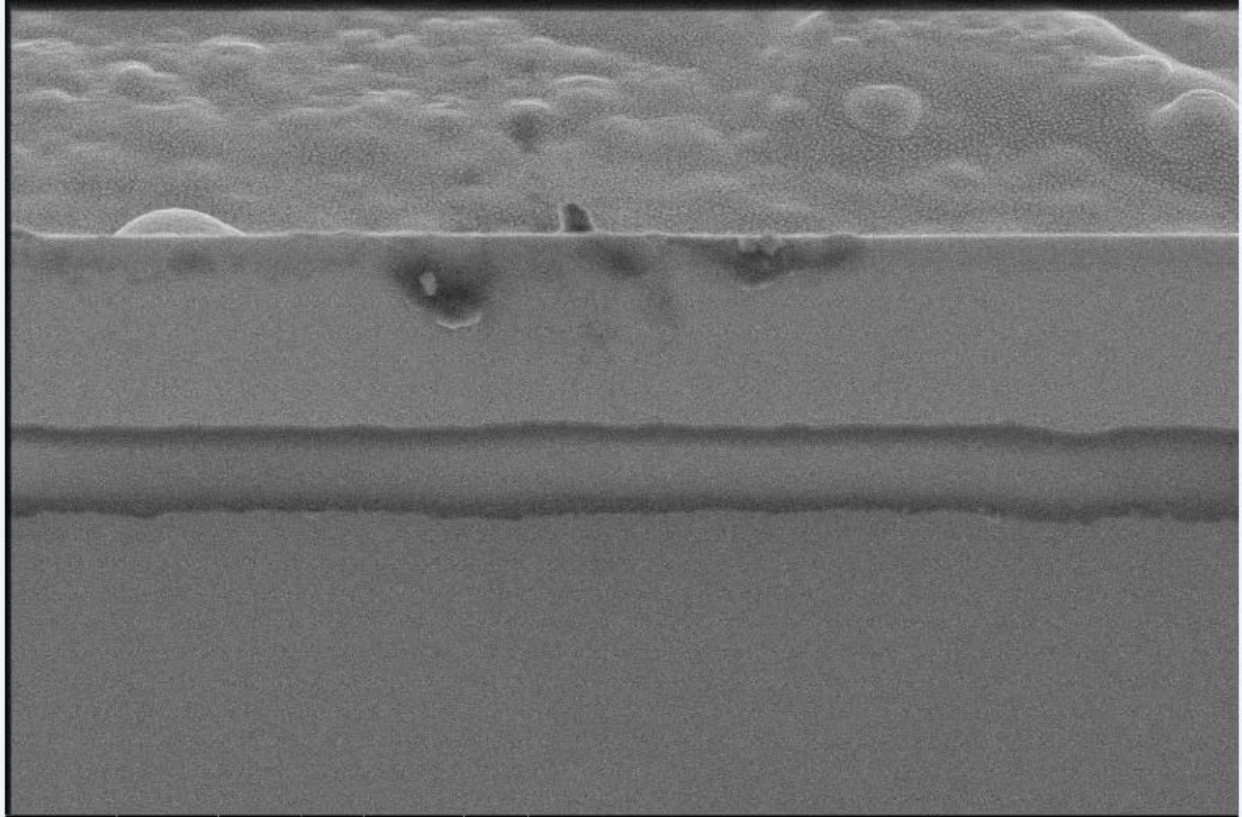


mag	HV	curr	bias	WD	det	mode	tilt	2 μm	
20 000 x	2.00 kV	13 pA	0 V	4.5 mm	TLD	SE	52 °	NCSU Analytical Instrumentation Facility Verios 460L	

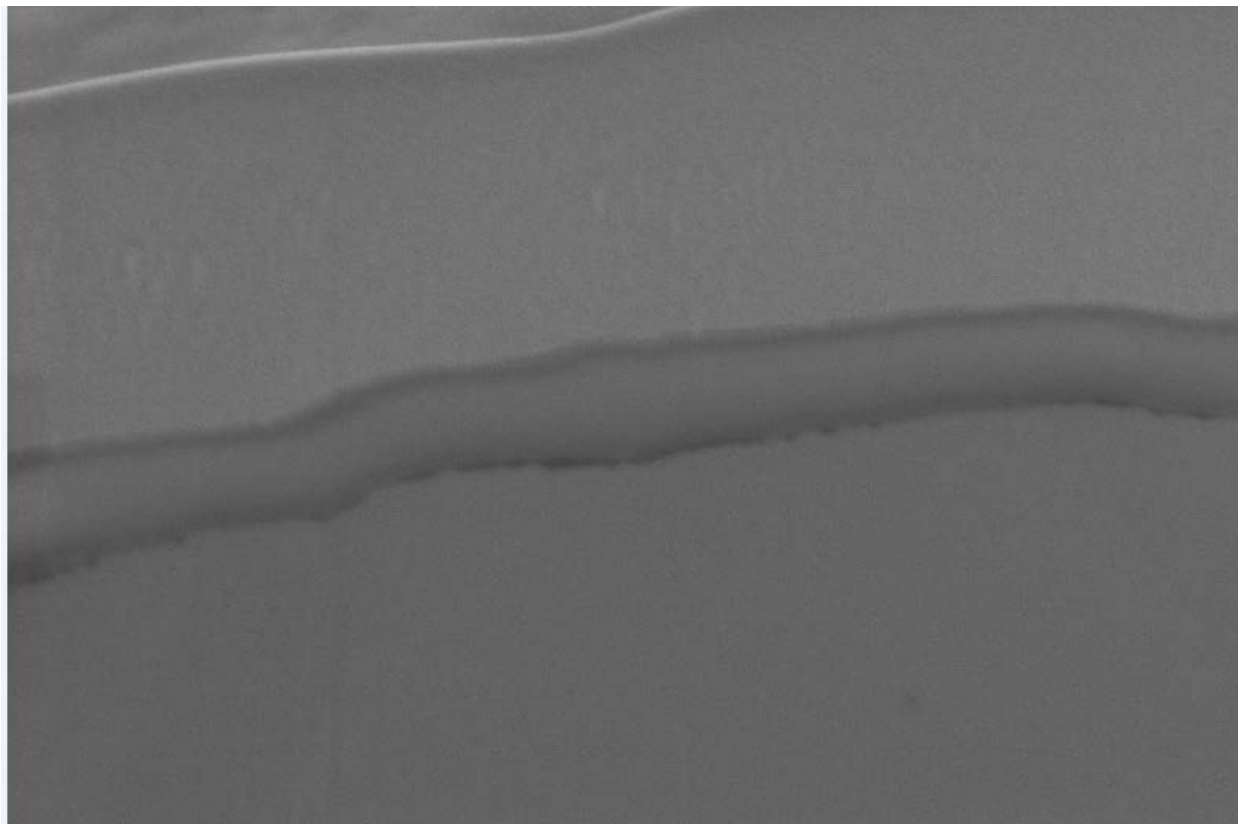

mag	HV	curr	bias	WD	det	mode	tilt	2 μ m	
25 000 x	2.00 kV	50 pA	50 V	4.4 mm	TLD	BD	52 °	NCSU Analytical Instrumentation Facility Verios 460L	

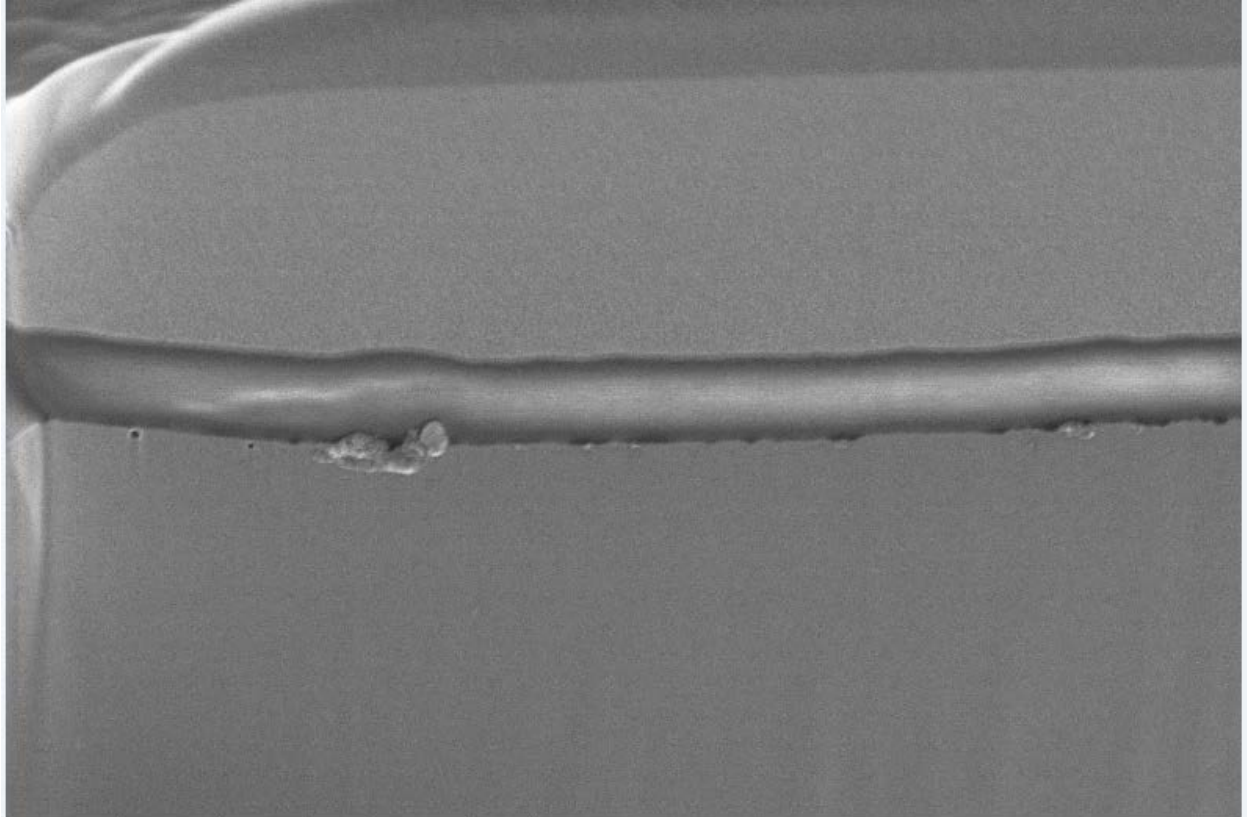

mag	HV	curr	bias	WD	det	mode	tilt	2 μm	
20 000 x	2.00 kV	25 pA	0 V	4.5 mm	TLD	SE	52 °	NCSU Analytical Instrumentation Facility Verios 460L	

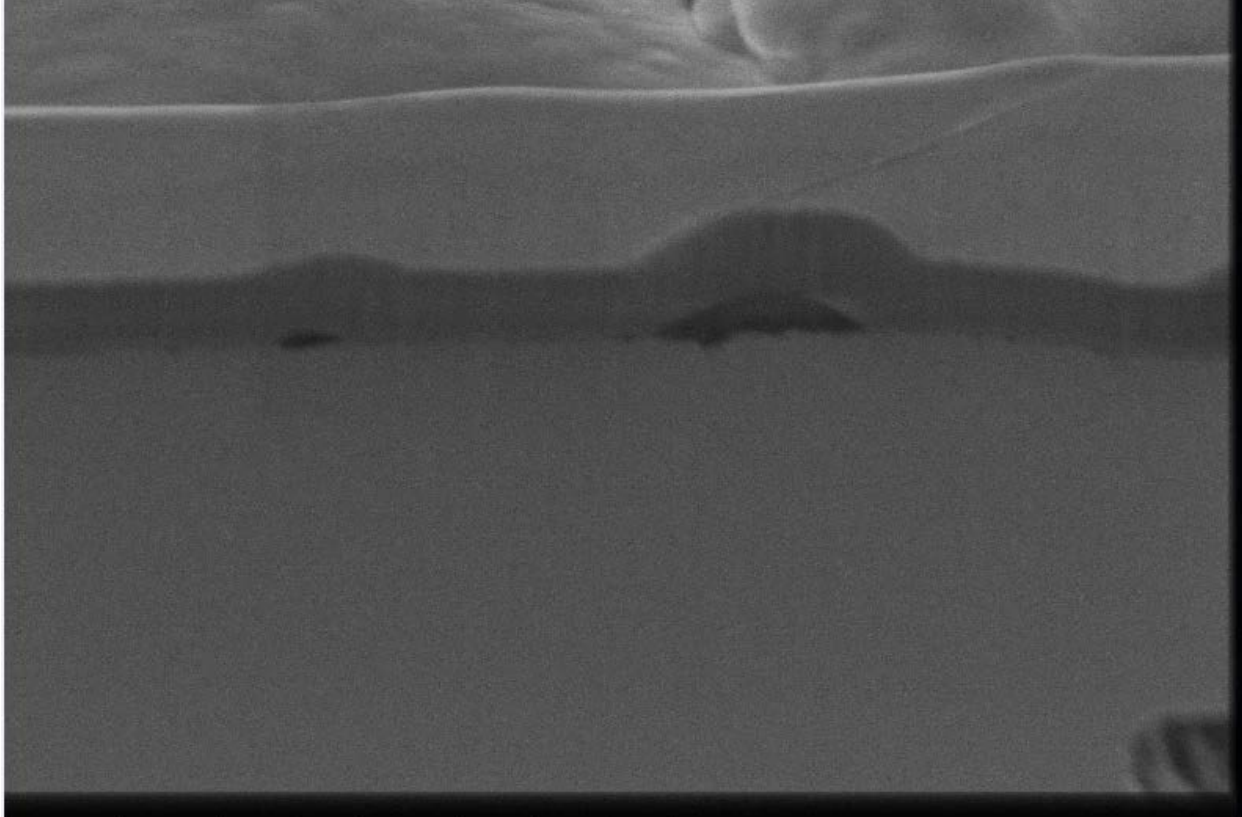

mag	只	HV	curr	bias	WD	det	mode	tilt	2 μm
19 994 x		2.00 kV	25 pA	0 V	4.8 mm	TLD	SE	52 °	NCSU Analytical Instrumentation Facility Verios 460L